

## AST4410 Class 1 Div 1 IS Groups C, D with Approved Barrier Media Isolated, Field Adjustable Pressure Sensor

### OVERVIEW

The AST4410 is a media isolated, field adjustable pressure transmitter suitable for use in Class 1 Div 1, Groups C, D Intrinsically Safe areas when installed with an approved barrier. Protected by a Viton O-ring, this transmitter's two potentiometers have the ability to adjust the zero and span output signals up to  $\pm 5\%$  [of the full scale pressure]. Additionally, the AST4410 offers access points through the housing of the transmitter in order to simplify adjustments after installation. Complete with a wide range of threads, pressure ranges and output signals, the AST4410 is the solution for pressure measurement when field adjustability is necessary.

### BENEFITS

- UL/cUL 913 (CSA 157) Class 1 Div 1 Groups C, D IS with approved Barrier (see page 2)
- High Strength Stainless Steel Construction
- No Oil, Welds or Internal O-rings
- Wide Operating Temperature Range
- Ranges from Vacuum to 10,000 PSI
- Low Static and Thermal Errors
- Unparalleled Price and Performance
- Compatible with Wide Range of Liquids and Gases
- EMI/RFI Protection


### APPLICATIONS

- Refrigeration
- Industrial OEM Equipment
- Pressure Instrumentation
- Gas Compression & Storage
- Oxygen Delivery Systems
- Water Management
- Oil & Gas Platforms
- Process Control
- Test Stands
- Hydrogen Fuel (316L)

### Electrical Data

Output	4-20mA	1-5VDC, 1-6VDC
Excitation	10-28VDC	10-28VDC
Output Impedance	>10k Ohms	<100 Ohms, Nominal
Current Consumption:	20mA, typ.	<10mA
Bandwidth	(-3dB): DC to 250 Hz	(-3dB): DC to 1kHz
Output Noise:	-	<2mV RMS
Zero Offset:	< $\pm 1\%$ of FS	< $\pm 1\%$ of FS
Span Tolerance:	< $\pm 2\%$ of FS	< $\pm 1.5\%$ of FS
Output Load:	0-800 Ohms @10-28VDC	10k Ohms, Min.
Reverse Polarity Protection	Yes	Yes

### ZERO & SPAN ADJUSTABILITY

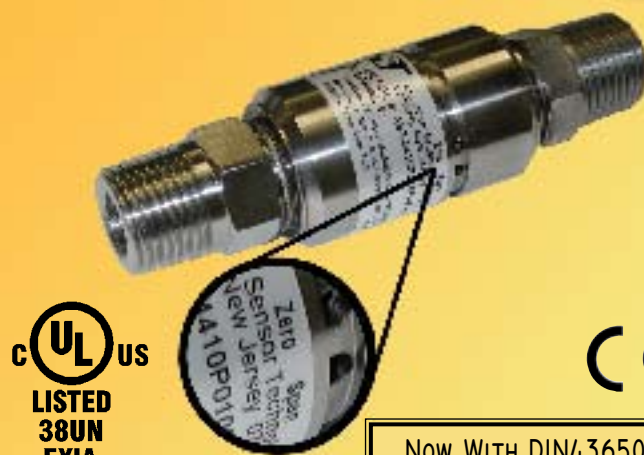

Now With DIN43650A!

### Performance @25°C (77°F)

Accuracy*	< $\pm 0.25\%$ BFSL
Stability (1 year)	$\pm 0.25\%$ FS, typ
Over range Protection	2X Rated Pressure
Burst Pressure	5X or 20,000 psi (whichever is less)
Pressure Cycles	> 100 Million

\* Accuracy includes non-linearity, hysteresis & non-repeatability

### Environmental Data

#### Temperature

Operating	-40 to 85°C (-40 to 185°F)
Storage	-40 to 100°C (-40 to 212°F)

#### Thermal Limits

Compensated Range	0 to 55°C (30 to 130°F)
TC Zero	< $\pm 1.5\%$ of FS
TC Span	< $\pm 1.5\%$ of FS

#### Other

Shock	100G, 11 msec, 1/2 sine
Vibration	10G peak, 20 to 2000 Hz.
EMI/RFI Protection:	Yes
Rating:	IP-66

### American Sensor Technologies

450 Clark Drive, Mount Olive, NJ 07828 USA  
Tel 973.448.1901 Fax 973.448.1905 Email: [info@astsensors.com](mailto:info@astsensors.com)

[www.astsensors.com](http://www.astsensors.com)

# Ordering Information

**AST4410 A 00500 P 3 L 1 000**

## Series Type

## Process Connection

A=1/4" NPT Male  
 B=1/8" NPT Male  
 C=1/4" BSPP Male  
 I= 1/4" NPT Female  
 P=1/2" NPT Male

## Pressure Range

Insert pressure range code from chart

## Pressure Unit

B= Bar  
 K= kg/cm<sup>2</sup>  
 P= PSI

## Outputs

3= 1-5V  
 4= 4-20mA (2 wire loop powered)

## Electrical

A= 2Ft.(0.6m)      I= DIN 43650A  
 B= 4Ft.(1.2m)      L= Conduit fitting, Cable 2ft  
 C= 6Ft.(1.8m)      M= Conduit fitting, Cable 4ft  
 D= 10Ft.(3.0m)     N= Conduit fitting, Cable 6ft  
 E= Mini DIN 43650C   P= Conduit fitting, Cable 10ft

## Wetted Material

1=316 L

## Options

000= No special options

## Pressure Ranges\*

PSIG Measurement Range	Pressure Range Code	BARG Measurement Range	Pressure Range Code
-14.7 to 30**	V0030**	-1 to 2**	V0002**
0-25	00025	0-2	00002
0-50	00050	0-5	00005
0-100	00100	0-7	00007
0-200	00200	0-10	00010
0-250	00250	0-20	00020
0-300	00300	0-50	00050
0-500	00500	0-70	00070
0-1,000	01000	0-100	00100
0-1,500	01500	0-250	00250
0-2,500	02500	0-350	00350
0-3000	03000	0-500	00500
0-5,000	05000	0-700	00700
0-7,500	07500		
0-10,000	10000		

\*Typical ranges. All ranges between 0-25 psi and 0-10,000 psi available.  
 \*\*Compound ranges up to -14.7 to 2500 psi available. Please consult factory.

## Barrier Installation

AST Drawing #A01657

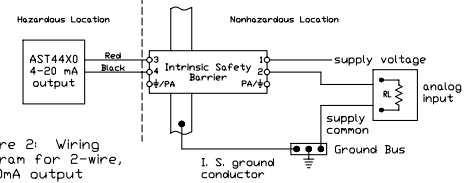


Figure 2: Wiring diagram for 2-wire, 4-20mA output

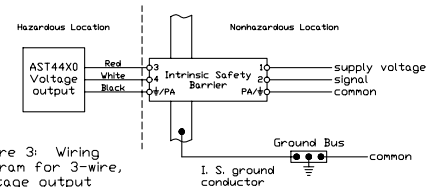


Figure 3: Wiring diagram for 3-wire, Voltage output

The transducers listed below are designed for installation in a Class I, Division 1; Groups C and D, Division 1 hazardous location when connected to Associated Apparatus as described in note 1.

### Entity Parameters


V<sub>max</sub> = 28V<sub>ac</sub>  
 I<sub>max</sub> = 175mA  
 C<sub>1</sub> = 0.44uF  
 L<sub>1</sub> = 0

I<sub>max</sub> is the total current available from the Associated Apparatus under any condition.

### Notes:

- Associated Apparatus shall provide intrinsically safe connections which meet the following parameters:  
 $V_{oc} \text{ or } V_t \leq V_{max}$        $C_a \geq C_1 + C_{leads}$   
 $I_{sc} \text{ or } I_t \leq I_{max}$        $L_a \geq L_1 + L_{leads}$
- Control Room apparatus shall not generate in excess of 250V (U<sub>max</sub>).
- Installation should be in accordance with Article 504 in the National Electrical Code, ANSI/NFPA 70.

## Dimensional Data

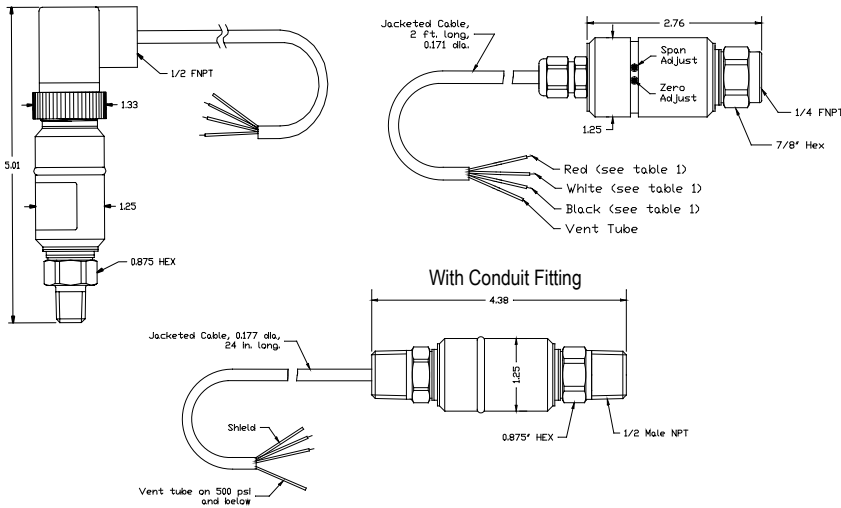

## Warranty

**Workmanship** - AST, Inc. pressure transmitters have a limited one-year warranty to the original purchaser. AST, Inc. will replace or repair, free of charge, any defective transmitter. This warranty does not apply to any units that have been modified; misused, neglected or installed where the application exceeds published ratings. AST's sensors are **made with pride in New Jersey, USA**. If in the area please feel free to stop by for a visit!

**Installation/Applications** - The purchaser is responsible for media compatibility, functional adequacy, and correct installation of the transmitter.

[www.astensors.com](http://www.astensors.com)